

WAT-06U2D/AL 1/2.8" USB2.0 Full HD Wearable Color Camera

Wearable camera with a high durable aluminum housing

NEW




*No CE&FCC

Key features

- USB Video Class & USB Bus Power (plug & play)
- Full HD (Max. frame rate 30fps)
- Enable the live video transmission via the smartphone or tablet by its Wi-Fi or 4G/5G
- Water resistant structure for outdoor use
- USB connector type can be changed to Type-A or Type-C (Std.: Micro-B)

Dimensions

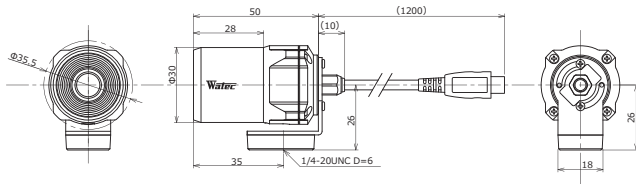

WAT-07U2D/AL 1/2.8" High Sensitivity USB2.0 Full HD Wearable B&W Camera

High sensitivity wearable camera with a high durable aluminum housing

NEW




*No CE&FCC

Key features

- Min. illumination 0.004 lx F2.0 (AGC ON=36dB, Shutter=OFF)
0.001 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)
- Full HD (Max. frame rate 30fps)
- Enable the live video transmission via the smartphone or tablet by its Wi-Fi or 4G/5G
- Water resistant structure for outdoor use
- USB connector type can be changed to Type-A or Type-C (Std.: Micro-B)

Dimensions

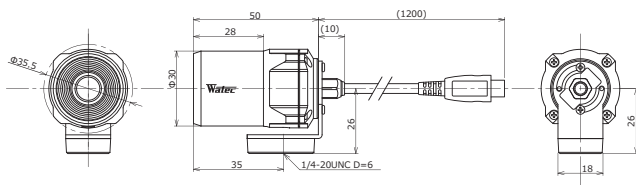

Specifications

Pick-up element	1/2.8 inch BSI CMOS image sensor	
Number of effective pixels	1945(H) × 1097(V)	
Unit cell size	2.9μm(H) × 2.9μm(V)	
Imaging system	RGB primary color bayer arrangement mosaic filters on chip	
Synchronizing system	Internal	
Scanning system	Progressive	
Output size	1920x1080, 1280x720, 640x480, 320x240	
Max. frame rate	30 fps	
Video compression	MJPG, YUY2	
Video output	USB Video Class (Compatible)	
Resolution (H)	More than 900 (Center)	
Minimum illumination	0.3 lx F2.0 (AGC ON=36dB, Shutter=OFF) 0.07 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)	
S/N	—	
Function settings	Camera Viewer	
AE mode	Fixed	1/15, 1/7.5, 1/4 sec.
	EI	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 sec.
White balance	ON	1/30 - 1/8000 sec.
	OFF	1/7.5 - 1/8000 sec.
AGC	ON	ATW, MWB
	OFF	0 - 36dB
MGC	0 - 72dB (1dB step)	
Gamma characteristics	γ=USER (Level adjustable)	
Noise reduction	—	
Wide dynamic range	—	
Lens iris	—	
Back light compensation	BLC	
White blemish correction	—	
Sharpness	Level adjustable	
Defog	—	
Digital zoom	x1, x1.38, x2.25 *1	x1, x1.2, x1.5 *2
Privacy mask	—	
Mirror image	—	
Freeze	—	
Motion detection	—	
Neg.image	—	
Interface	USB 2.0 Micro-B	
Power supply	USB +5V	
Power consumption	0.65W (130mA)	
Operating / Storage Temperature	-10 - +50°C / -30 - +70°C	
Operating / Storage Humidity	95% RH or less (Without condensation)	
Standard lens	M3620BC-12 (f3.6 F2.0)	
Cable length	1.2m (Max.3.0m)	
Weight	Approx. 98g	
Accessories	—	
Recommended System Specifications	CPU	Intel® Core TM i Series
	RAM	2GB or larger
	Others	USB2.0 Port, 1920×1080 or better resolution display
Operation Confirmed OS	Windows 10 32bit/64bit, Windows 11, Android 4.0 or newer	

*1: Output format: 640x480 *2: Output format: 1280x720

Specifications

Pick-up element	1/2.8 inch BSI CMOS image sensor	
Number of effective pixels	1945(H) × 1097(V)	
Unit cell size	2.9μm(H) × 2.9μm(V)	
Imaging system	—	
Synchronizing system	Internal	
Scanning system	Progressive	
Output size	1920x1080, 1280x720, 640x480, 320x240	
Max. frame rate	30 fps	
Video compression	MJPG, YUY2	
Video output	USB Video Class (Compatible)	
Resolution (H)	More than 800 (Center)	
Minimum illumination	0.004 lx F2.0 (AGC ON=36dB, Shutter=OFF) 0.001 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)	
S/N	—	
Function settings	Camera Viewer	
AE mode	Fixed	1/15, 1/7.5, 1/4 sec.
	EI	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 sec.
White balance	ON	1/30 - 1/8000 sec.
	OFF	1/7.5 - 1/8000 sec.
AGC	ON	0 - 36dB
	OFF	—
MGC	0 - 72dB (1dB step)	
Gamma characteristics	γ=USER (Level adjustable)	
Noise reduction	—	
Wide dynamic range	—	
Lens iris	—	
Back light compensation	BLC	
White blemish correction	—	
Sharpness	Level adjustable	
Defog	—	
Digital zoom	x1, x1.38, x2.25 *1	x1, x1.2, x1.5 *2
Privacy mask	—	
Mirror image	—	
Freeze	—	
Motion detection	—	
Neg.image	—	
Interface	USB 2.0 Micro-B	
Power supply	USB +5V	
Power consumption	0.65W (130mA)	
Operating / Storage Temperature	-10 - +50°C / -30 - +70°C	
Operating / Storage Humidity	95% RH or less (Without condensation)	
Standard lens	M3620BC-12 (f3.6 F2.0)	
Cable length	1.2m (Max.3.0m)	
Weight	Approx. 98g	
Accessories	—	
Recommended System Specifications	CPU	Intel® Core TM i Series
	RAM	2GB or larger
	Others	USB2.0 Port, 1920×1080 or better resolution display
Operation Confirmed OS	Windows 10 32bit/64bit, Windows 11, Android 4.0 or newer	

*1: Output format: 640x480 *2: Output format: 1280x720